

Your # 1 Source for Magnetic Contacts


CONTACT

DIMENSIONS


SPECIAL FEATURES

REPLACES

SURFACE MOUNT

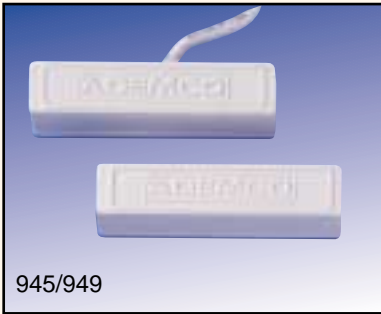

945/949

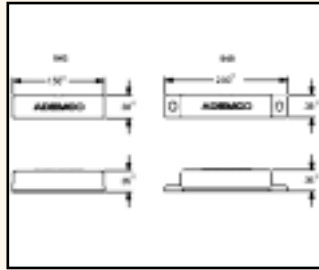


945/949 Surface Mount Magnetic Contact with Leads

- 15 foot zip cord leads standard
- Standard gap: 1-1/4"
- Choose self adhesive (945), or screw mount (949)
- Pkg. quantity=5/bag

- Sentrol 1035
- GRI 100-12,110-12
- Nascom N35
- Tane FM106
- Aleph PS1541



945T

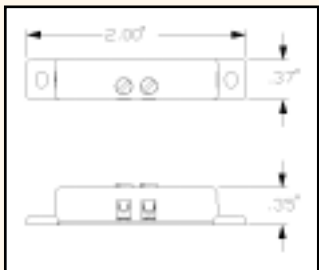

945T Mini Surface Mount with Screw Terminals


- Screw mount or adhesive mount
- Screw terminals eliminate wire splicing and soldering
- Standard gap: 1-1/8"

- Sentrol 1038T
- GRI 100T,110T
- Tane-60
- Aleph DC-2531

AVAILABLE
IN
AMMO BOX



PR-20445

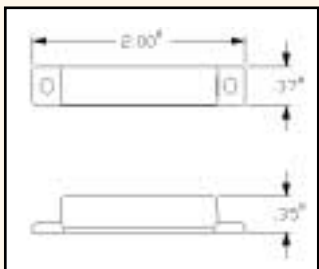


PR-20445 Mini Surface Mount with Leads

- Miniature size for cleaner look
- Standard gap: 1-1/4"
- 18" long wire leads
- Screw mount or adhesive mount


- Sentrol 1085,1032
- GRI 110-12
- Nascom N35
- Tane FM106
- Aleph PS1541

AVAILABLE
IN
AMMO BOX

COMMERCIAL

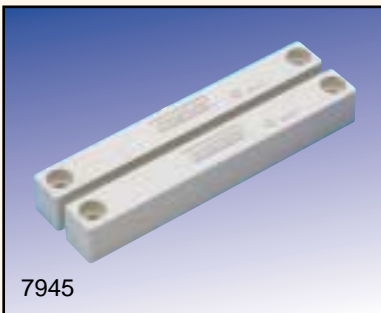


7945

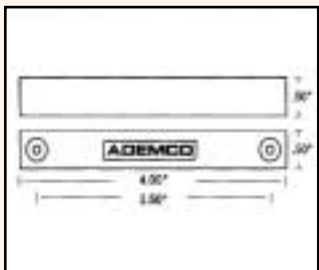


7945 XTP Surface Mount Magnetic Contact with Leads

- XTP contacts withstand surges up to 2400 volts DC
- 6' CLII cable is standard
- Epoxy sealed
- Wide gap of 2.5"
- Available in SPDT (7945-2GY)
- Pkg. quantity=1/bag

- Sentrol 1045
- GRI 400,410
- Amseco AMS37

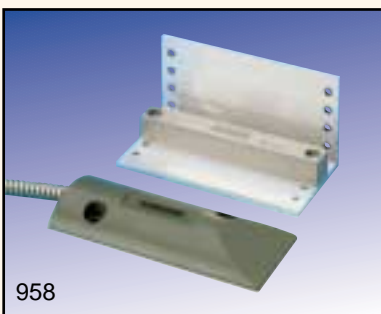

958

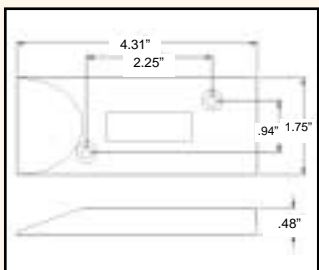

958 Overhead Door Magnetic Contact

- Adjustable magnet with L-bracket
- 24" armored cable is standard
- Standard gap: 2-3/8"
- Epoxy sealed for protection from moisture and impact
- Available in SPDT (958-2)
- Pkg. quantity=1/bag











- Amseco ODC59A
- Sentrol 2202AU,2202A
- GRI 4532/4532L




ALL MODELS:
Specify color: White (WH), Brown (BR), Gray (GY)

Your # 1 Source for Magnetic Contacts

COMMERCIAL

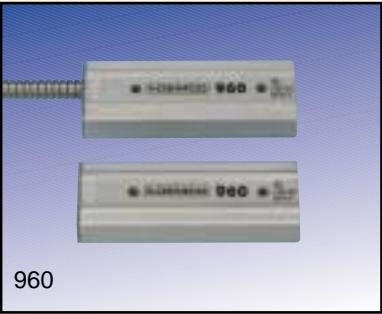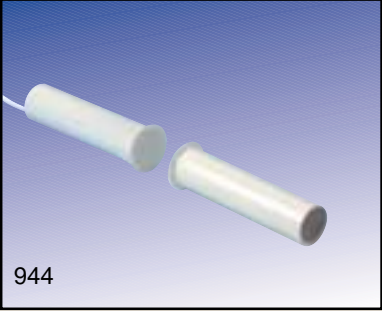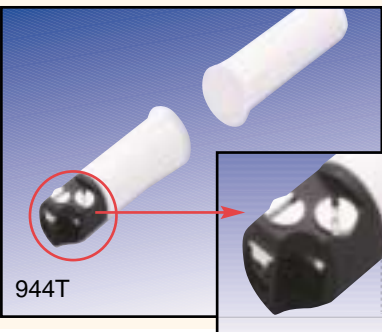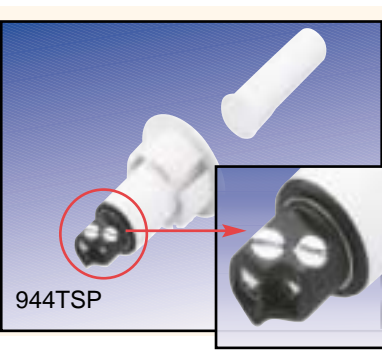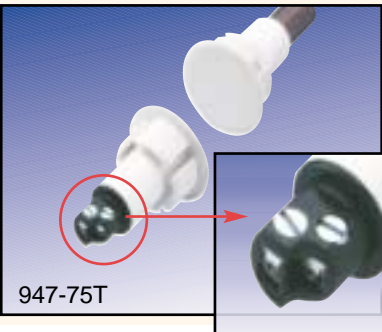

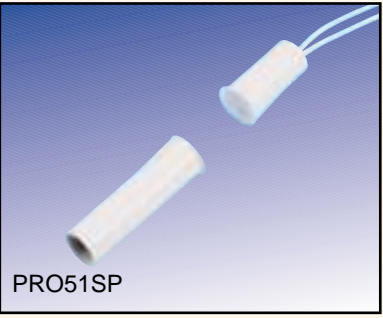

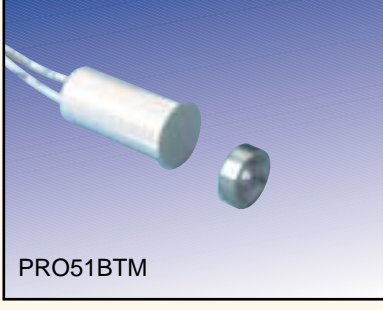



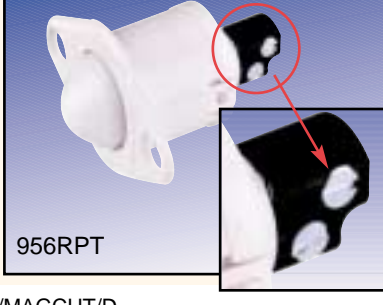

RECESSED




| CONTACT | DIMENSIONS | SPECIAL FEATURES | REPLACES |
|--|---|---|---|
|  <p>960</p> |  <p>ADEMCO 960</p> | <p>960 XTP Surface Mount Magnetic Contact</p> <ul style="list-style-type: none"> • XTP contacts withstand surges up to 2400 volts DC • Epoxy Sealed • 3' armored cable is standard • Wide gap of 2.5" • Available in SPDT (960-2) • Pkg. quantity=1/bag | <ul style="list-style-type: none"> •Sentrol 2505A •GRI 4400 •Nascom 505A |
|  <p>944</p> |  | <p>944 3/8" Diameter Recessed Contact</p> <ul style="list-style-type: none"> • Standard gap: 3/4" • Convenient 5' zip cord leads are standard • Available in SPDT (944-2GY) <p>• PR-20411 for PRO version with 18" leads</p> | <ul style="list-style-type: none"> •Sentrol 1075 •GRI 2020-12 •Nascom N-75 •Tane TAP-10 •Aleph DC-1621 <p>AVAILABLE IN AMMO BOX</p> |
|  <p>944T</p> |  | <p>944T 3/8" Diameter Recessed Contact with Screw Terminals</p> <ul style="list-style-type: none"> • 3/8" diameter press fit design • Exclusive Staggered "T" terminals eliminate splice & solder and are compatible with standard screw driver • Standard gap: 3/4" | <ul style="list-style-type: none"> •Sentrol 1125T •GRI 2020T •Aleph DC- 3621 •Tane-3/8T <p>AVAILABLE IN AMMO BOX</p> |
|  <p>944TSP</p> |  | <p>944TSP 3/4" Recessed Contact with 3/8" Magnet</p> <ul style="list-style-type: none"> • 3/4" diameter switch for easier wiring...3/8" diameter magnet • Exclusive Staggered "T" terminals eliminate splice & solder and are compatible with standard screw driver • Standard gap: 3/4" • Available with 5' leads (944SP) | <ul style="list-style-type: none"> •GRI 120T-12 <p>AVAILABLE IN AMMO BOX</p> |
|  <p>947-75T</p> |  | <p>947-75T 3/4" Diameter Steel Door Contact with Terminals</p> <ul style="list-style-type: none"> • Standard gap: 1/2" in steel • Exclusive Staggered "T" terminals eliminate splice & solder and are compatible with standard screw driver • Order 947-75 for 5' leads | <ul style="list-style-type: none"> •Sentrol 1078CT •GRI 8080-T •Tane 3/4 TC <p>AVAILABLE IN AMMO BOX</p> |

ALL MODELS:   
 Specify color: White (WH), Brown (BR), Gray (GY)

Your # 1 Source for Magnetic Contacts

RECESSED

| CONTACT | DIMENSIONS | SPECIAL FEATURES | REPLACES |
|---|---|---|--|
|  <p>951</p> |  | <p>951 3/8" Diameter Mini Recessed Contact</p> <ul style="list-style-type: none"> • With magnet only 1/2" long, the 951 is ideal for casement windows, sliding windows and other thin frame applications • Standard gap: 7/16" • 5' zip cord leads are standard <p>• PR-20451 for PRO version with 18" leads</p> | <ul style="list-style-type: none"> • Sentrol 1125 • GRI 20RS-12 • Nascom N-175N • Tane STB-10 • Aleph DC-1651 <p>AVAILABLE IN AMMO BOX</p> |
|  <p>PRO51SP</p> |  | <p>PRO51SP "Stubby" Press Fit Recessed Magnetic Contact with Wide Gap</p> <ul style="list-style-type: none"> • Stubby 3/8" diameter switch with extra length magnet • Standard gap: up to 3/4" • 18" Leads | <ul style="list-style-type: none"> • GRI 5065 • Aleph PS-1650 <p>AVAILABLE IN AMMO BOX</p> |
|  <p>PRO51BTM</p> |  | <p>PRO51BTM 3/8" "Stubby" Recessed Contact with Rare Earth Button Magnet</p> <ul style="list-style-type: none"> • "Stubby" 3/8" press fit with button magnet • Powerful rare earth magnet is easy to install with screw or adhesive • Standard gap: 1/2" • Pkg. quantity=5/bag | <ul style="list-style-type: none"> • Sentrol R-1125 • GRI N-20RS-12 • Tane STB-10DM |
|  <p>955PST</p> |  | <p>955PST 3/4" Recessed Plunger Switch</p> <ul style="list-style-type: none"> • Fast and easy to install • Perfect for internal doors... wide range of applications • Exclusive Staggered "T" terminals eliminate splice & solder and are compatible with standard screwdriver <p>• Order 955PS for 18" leads</p> | <ul style="list-style-type: none"> • Sentrol 3015 • GRI PBF-100T • Tane PB-52T <p>AVAILABLE IN AMMO BOX</p> |
|  <p>956RPT</p> |  | <p>956RPT 3/4" Recessed Roller Plunger Switch</p> <ul style="list-style-type: none"> • Fast and easy to install • Perfect for internal doors... wide range of applications • Exclusive Staggered "T" terminals eliminate splice & solder and are compatible with standard screwdriver <p>• Order 956RP for 18" leads</p> | <ul style="list-style-type: none"> • Sentrol 3005,3008 • GRI DS-01T • Tane RB-32 <p>AVAILABLE IN AMMO BOX</p> |

ALL MODELS:   
 Specify color: White (WH), Brown (BR), Gray (GY)

Your # 1 Source for Magnetic Contacts

CONTACT

DIMENSIONS


SPECIAL FEATURES

REPLACES

SURFACE MOUNT




7939

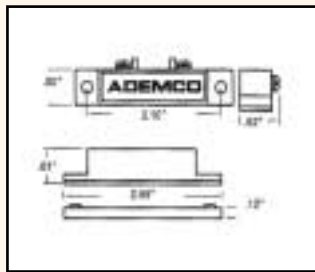


- 7939**
Surface Mount Magnetic Contact
- Standard gap: 1.0"
 - Spacers, covers and screws included
 - Cover conceals end of line resistor (EOL)
 - Available in SPDT (7939-2) and wide gap (7939W)
- **PR-20439 WH or BR for PRO version**

- Sentrol 1085T,1285T
- GRI 29A
- Nascom N-85T
- Tane SM35
- Aleph DC2541

**AVAILABLE
IN
AMMO BOX**

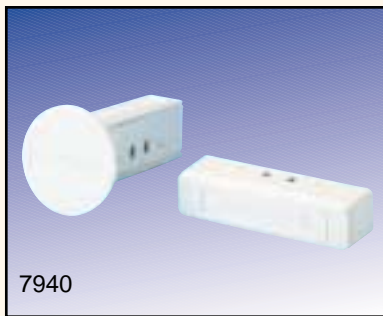


7940

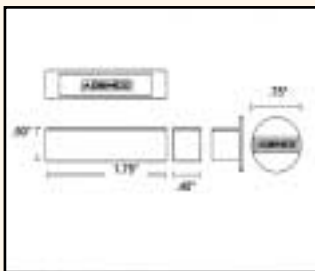


- 7940**
Universal Surface/Recessed Mount
- Screw mount, adhesive mount or recessed
 - Wide gap: 2", recessed: 1"
 - Unique quick wire connections – just insert wires and tighten – no stripping or soldering
 - Recessed adaptors included

- Sentrol 1038T
- Amseco AMS51
- Tane- 50

**AVAILABLE
IN
AMMO BOX**

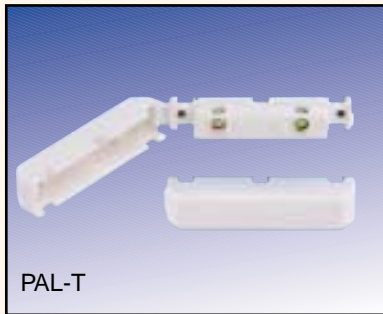


PAL-T

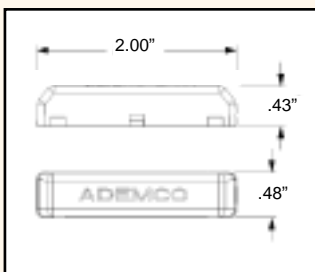


- PAL-T**
Surface Mount Magnetic Contact
- Unique snap open case cover – no loose parts
 - Concealed screw terminals eliminate splicing and soldering
 - Super 1-1/8" gap makes installation a snap
 - Screw mount or adhesive mount
 - 6 wire entry points for mounting versatility
- **PAL-WH or BR for 5ft. leads**

- Sentrol 1038T
- GRI 100T,110T
- Tane- 60
- Aleph DC-2531

**AVAILABLE
IN
AMMO BOX**

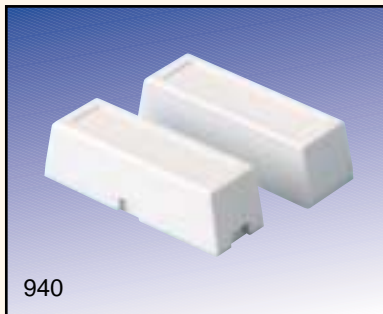


940

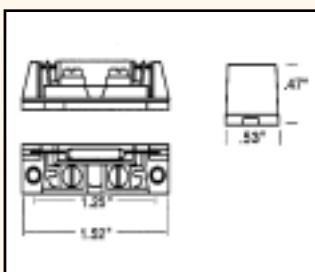


- 940**
Surface Mount Magnetic Contact
- Attractive cover keeps mounting screws, terminal screws, or EOL resistor hidden
 - Standard gap: 3/4"
 - Complete with spacers and mounting screws

- Sentrol 1085T
- GRI 29A, 129A
- Nascom N285T
- Aleph PS-1523

**AVAILABLE
IN
AMMO BOX**

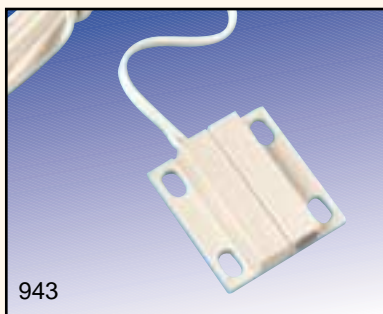

943

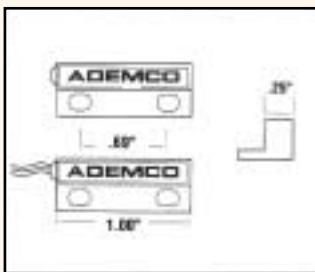

- 943**
Mini Surface Mount with Leads
- Self adhesive or screw mount
 - Flange snaps off for even smaller adhesive mount switch
 - 5' zip cord leads standard (943)
 - Standard gap: 1/2"

- Sentrol 1145
- GRI 50F-12
- Nascom N25

**AVAILABLE
IN
AMMO BOX**

- **PR-20443 for PRO version**
 (no logo and 18" leads)

ALL MODELS: U_L U_C CE
 Specify color: White (WH), Brown (BR), Gray (GY)