5000 Series Telephone Entry Control Systems

Silent Knight opens the door to low cost, full capacity entry controls that can be mounted indoors or out.
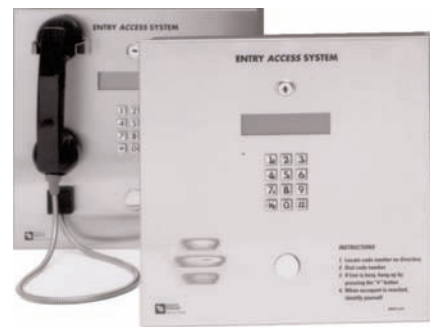
Reliable entry control for large, multi-tenant buildings doesn't have to cost a small fortune. Silent Knight's 5000 Series entry control system delivers reliable, weather-resistant performance at a price no comparable system can match. The 5000 series entry system is perfect for commercial and residential complexes, and gated communities needing entry access. The easy-to-install design requires only a single phone line, and it's built tough to maintain its peak performance and good looks for years. No other system works so hard to protect your facility and your budget. For more information, please call 1-800-446-6444. In Minnesota, call (763) 493-6435.

Maximum security that's both versatile and reliable.

The security needs of buildings vary depending on area crime levels, customers needs, and building layout. The more versatile your entry system, the better it will function in different situations. The Silent Knight 5000 series features; flexible microprocessor based technology, non-volatile flash memory for superior reliability, plus a number of advanced built-in security features.

Features

- Only resident-side telephones will open system doors
- Door-strike time lengths are programmable
- Programmable user codes for keyless entry (4 - 6 digits)
- Up/Downloadable programming with SKSS (Silent Knight Software Suite)
- All tenant phone numbers remain confidential
- System options and user information is stored in flash memory for instant recovery after total power loss

- Postal lock installation provisions
- 20 digit dialing capability
- Simple programming through built-in touchpad
- 1,000 occupant capacity out of the box. No expansion chips required
- Each 5083/5084 can be configured as a master or slave (satellite) unit. Only one master unit per system
- Up to four slave (satellite) units can be connected to the master unit to cover multiple entry points, sharing a single phone line
- Handsfree (5083) and Handset (5084) models
- Built-in touch-tone and/or time window controlled auxiliary relay
- Large backlit LCD display
- Surface or flush mountable
- Vandal-resistant rust-resistant weather-resistant stainless steel cabinets
- Braille touchpads
- 4 different greeting messages to choose from

Specifications

Tenant capacity:	Up to 1,000
Input Voltage:	16.5 VAC 40 VA
Door Relay:	24 V @ 1A
Auxiliary Relay:	24 V @ 1A
Battery Circuit:	2 hours (depending on usage)
Operating Temperature:	32° - 120° F (0° - 49° C)
With heater kit 5076	-20° - 120° F (-29° - 49° C)
Dimensions:	
Frame	12-5/8" x 12-3/8" (32 cm x 31.4 cm)
Hole Cut-out	11-1/4" x 11" (28.6 cm x 27.9 cm)
Depth in wall	3-3/8" (8.6 cm)

SILENT KNIGHT

by Honeywell

5000 Series Entry Control System

Ordering Information

5083-Hands-free unit
Weather resistant. 1,000 tenant capacity. Surface or flush mountable. Shipping Weight 21 lbs.

5084-Hand-set unit
Weather resistant. 1,000 tenant capacity. Surface or flush mountable. Shipping Weight 21 lbs.
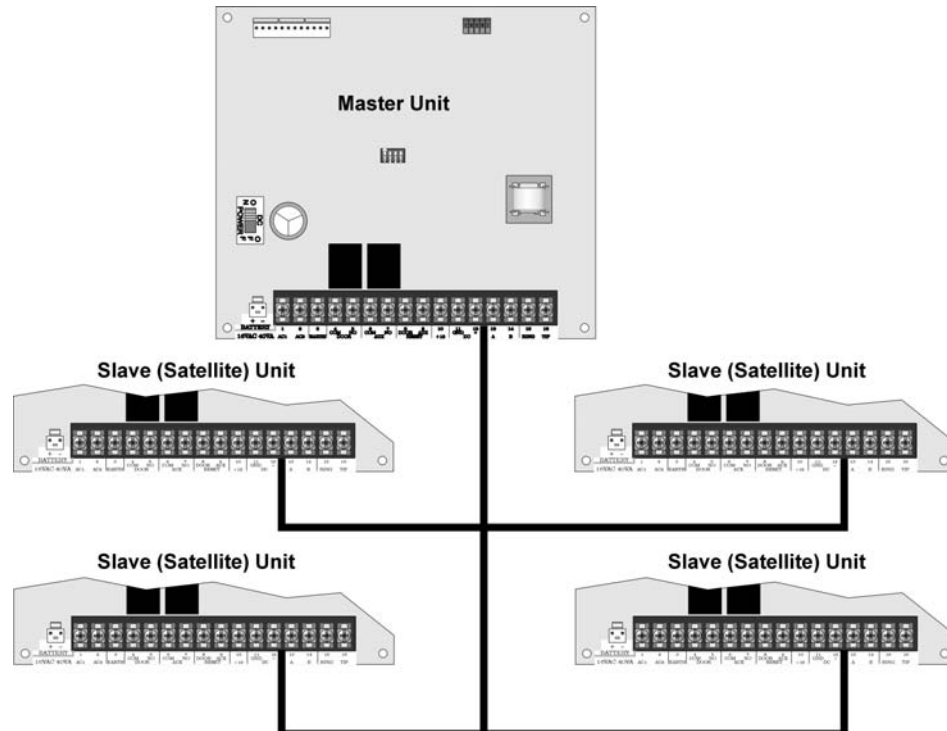
5096-Tenant phone operation labels
Package of 12 (1" x 3.7") labels which can be attached to the tenant's telephone to provide operating instructions for the 5000 series entry control system.

5076-Cold weather heater kit
The 5076 heater kit can be used with the 5083/84 entry systems. It is designed to maintain the temperature inside the cabinet above 32° F when the outside temperature is as low as -20° F. The heater uses a self-regulating PTC (Positive Temperature Coefficient) materiel for the heating element. The heater is powered by a 16.5 VAC 40 VA Class 2 transformer. Connections are made to the heater using a two position terminal strip. The heater bracket is electrically insulated from the heater element. The 5076 measures 5-1/2" H x 4" W x 1/2" T (12.83 cm x 10.16 cm x 12 mm)

5083 Hands-free Entry System

MADE IN AMERICA
P/N 350074, (06/06)